

9000VF Labeling System



Features

- Heavy-duty stainless steel base frame
- Raised bed stainless steel conveyor provides easy access for cleaning
- Stainless steel enclosures, covers and guards
- Touch-screen operator interface offers state-of-the-art controls for operation and support of entire labeling system
- Vertical roller fixture assembly assures precise and non-skewed continuous label application
- No-error operation
- Single infeed timing screw with no-tools-needed changeover
- Verification and inspection system supports the total range of printing and interrogation options
- Track and eject capabilities
- Self-centering product detection


9000VF Vertical Fixture Wraparound Labeler

The Accraply Model 9000VF provides highly accurate, high speed wraparound labeling to a wide variety of small diameter, conveyor stable, cylindrical containers. It is extremely accurate due to the system's vertical roller fixtures which side reference the containers as they are being labeled. This precise side referencing virtually eliminates label skew. Interchangeable infeed timing screw and roller assemblies are available for simple conversion to different product sizes.

Designed for use with integrated inspection systems, the 9000VF is also easy to setup, operate, and maintain.

Options

- Additional vertical fixture
- Additional peeler plate
- Hot stamp or other printers
- Inspection systems integration
- Low and broken web and printer detection packages
- Free-standing large capacity label unwinds
- Additional timing screw
- Splice detector

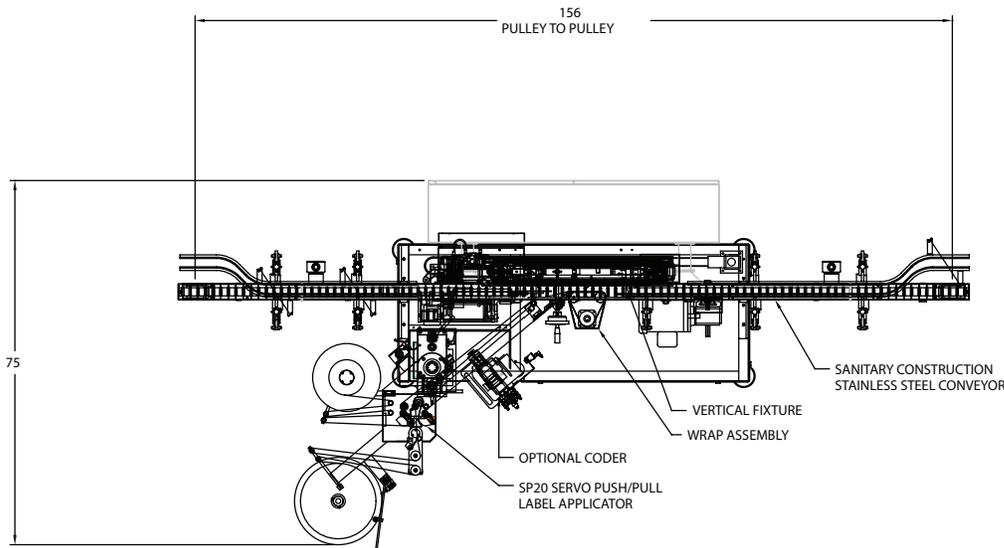

Application Rate	0 to 4000" (10160 cm) per minute, depending on product and label sizes
Production Rates	Up to 600 per minute depending on product and label sizes
Electrical Requirements	220/208 VAC, 3 Phase, 60 Hz, 15 Amp Service
Air Requirements	60 PSI
Product Conveyor	Flat ground top plate
Conveyor Elevation	35" - 42" (889 mm - 1067 mm)
Product Capacity	Maximum Diameter: 2" (51mm) Maximum Height: 4.5" (114mm) Minimum Diameter: .5" (13mm) Minimum Height: 1" (25mm)
Label Capacity	Maximum Width: 8" (203mm) Minimum Width: .375" (9.5mm) Roll Size-O.D.: 16" (406mm) Core Size-I.D.: 3" (76mm)
Label Staging Accuracy	±1/64" (.4 mm)

* Production rate indicated is subject to change, depending upon product and label combinations. All specifications and tooling requirements are subject to Accraply evaluation of all label and product samples. Specifications shown reflect standard machine capabilities. Accraply can also meet other specification requirements. Please call for details

Accraply | Trine | Stanford | Graham & Sleevit | Harland

Accraply

9350 W Broadway Avenue, Suite 190
Minneapolis, MN 55445 USA

+1 (763) 557-1313
accraply.com

