



Model 9000W



Features

- Heavy-duty stainless steel base frame supports a multitude of printing, verification and inspection systems
- Raised bed stainless steel conveyor provides easy access for cleaning
- Touch-screen operator interface offers state-of-the-art controls for operation and support of entire labeling system
- SP20 Push/Pull servo-driven label applicator provides precise web tension control and label stop accuracy
- Wrap station assembly assures precise and accurate continuous label application
- Variable pitch single infeed timing screw assembly provides consistent product presentation and quick, no-tools-needed changeovers

Model 9000W Wraparound Labeling System

The Accraply Model 9000W provides accurate, high speed wraparound labeling to a wide variety of conveyor stable, cylindrical containers. Designed for use with integrated inspection systems, the 9000W is easy to setup, operate, and maintain.

Our Heavy Duty SP 20 Servo driven label applicator features push/pull web drive which provides extremely accurate and repeatable stop position for precise lot & expiry coding and inspection. Superior web control also gives the SP20 accurate dispensing performance at very high indexing speeds.


The flexible HMI provides all the controls necessary for various applications including set-up recipes, counters, and graphical fault displays.

Product changeovers are simple and fast using our no-tools guides, infeed timing screw, and wraparound assemblies.

Options

- Tooling for oversized caps and recessed label panels
- Laser, thermal transfer, ink jet & hot stamp printer
- Integration of a wide range of inspection systems
- Product, label, and eject counters
- Complete system alarm packages with any combination of audio alarm, visual alarm, and conveyor stop
- Free-standing dual label unwinds with splice station
- Waste cutter to eliminate the need to stop and remove waste rolls
- Splice detector
- Clear label sensor - noncontact
- Product or label eject stations
- Label pick-off assembly

Application Speed	0 to 4000" (101M) per minute, depending on product and label sizes
Electrical Requirements	220/208 VAC, 3 Phase, 60 Hz, 15 Amp Service
Air Requirements	60 PSI
Product Conveyor	Flat ground top plate
Conveyor Elevation	35" - 42" (889 mm - 1067 mm)
Production Rates	Up to 300 per minute on standard wrap assembly
Product Capacity	Max Diameter: 6" (152 mm) Max Height: 12" (304 mm) Min Diameter: .5" (13 mm) Min Height: 1" (25 mm)
Label Capacity	Max Width: 8" (203 mm) Min Width: .375" (9.5 mm) Roll Size-O.D.: 16" (406 mm) or 20" (508 mm) Core Size-I.D.: 3" (76 mm)
Label Staging Accuracy	±1/64" (.4 mm)

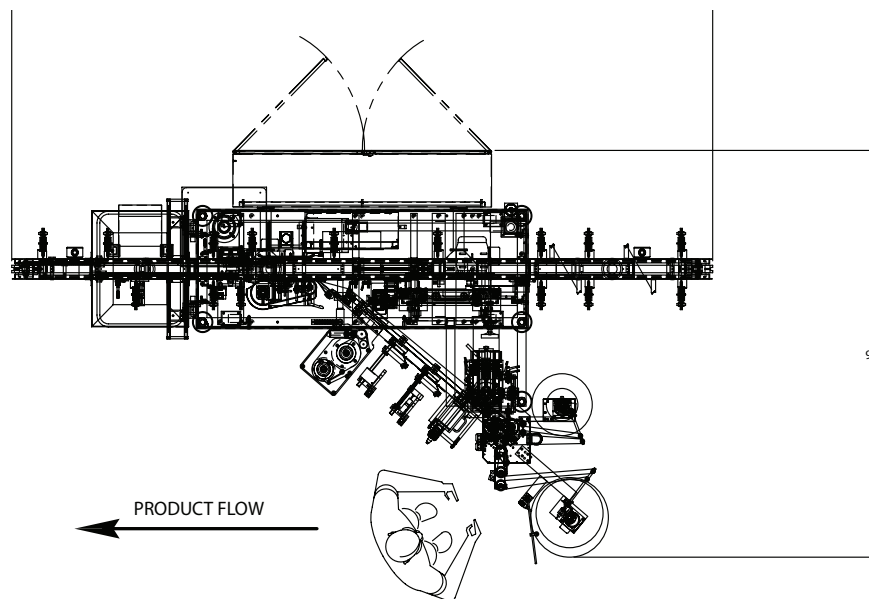

Accraply

Trine

Stanford

Graham

Sleevit

Harland

BW Packaging Systems represents the collective capabilities of Barry-Wehmiller packaging companies including, Accraply, BW Flexible Systems, BW Integrated Systems, Pneumatic Scale Angelus and Synerlink. Through their diverse capabilities, these companies can collectively provide everything from a single piece of equipment to fully integrated packaging systems for a wide range of industries, including: food and beverage, personal care, container manufacturing, pharmaceutical and medical devices, household products, paper products and textiles, industrial and automotive, and converting, printing and publishing. For more information, go to BWPackagingSystems.com

