





Stanford AccraSeam™ RT³ Turret Seamer

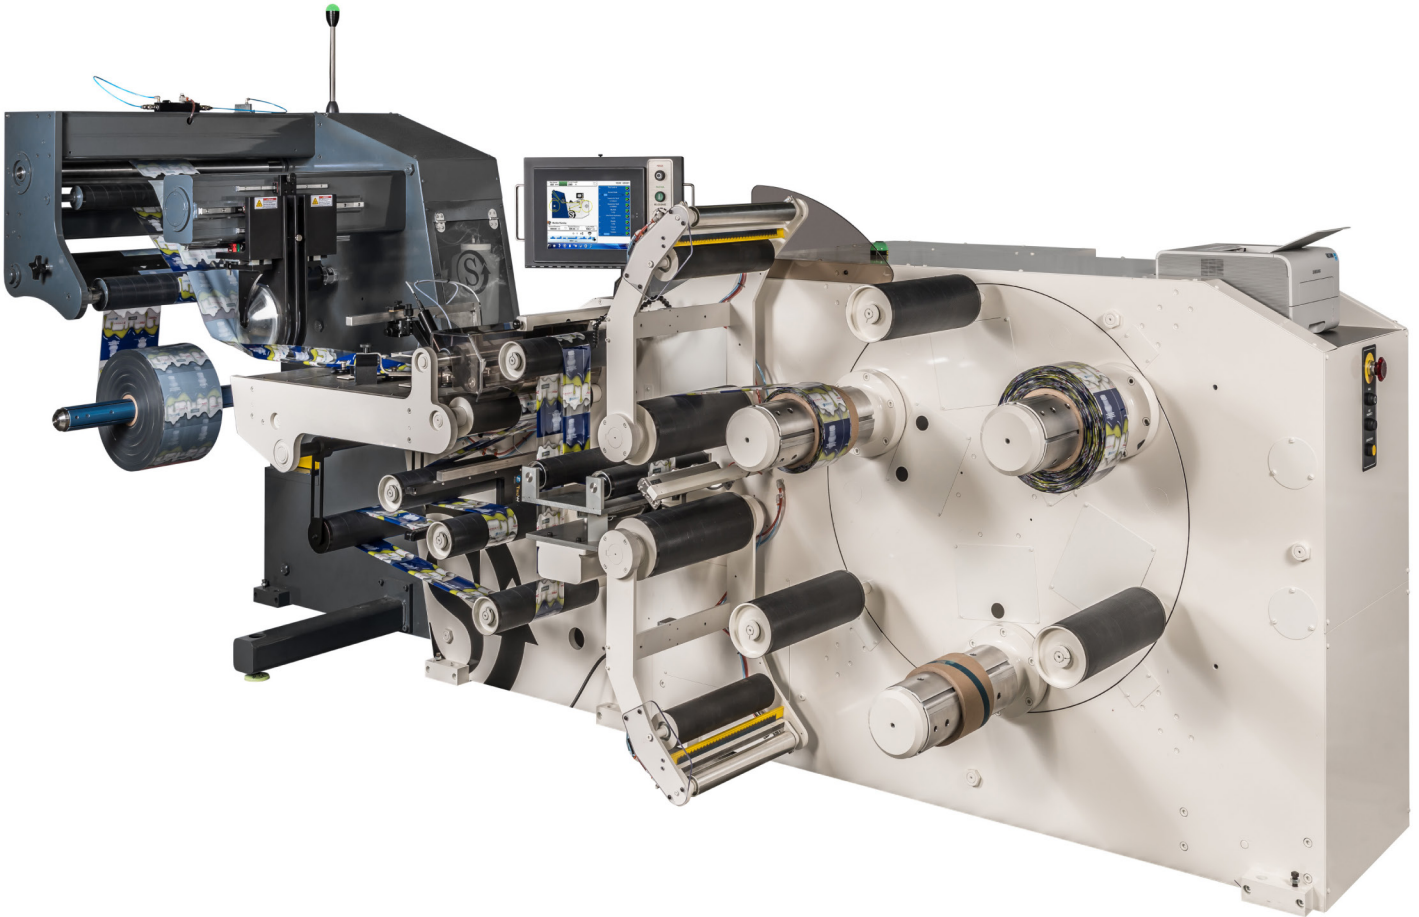

Features

- Flying transfers up to 500 mpm (1,650fpm)
- Fully automated layflat adjustment with precise servo-controlled movement
- Three-position, servo-driven continuous operation turret rewind
- Forms and seals PVC, PET, PETG, OPS and PLA films
- Ultrasonic sleeve-width measuring device provides precise layflat monitoring
- Intuitive touchscreen controls with unlimited recipes
- Electronic core size adjustment
- Available as a field upgrade to all AccraSeams
- Internet based remote diagnostic with WiFi capability

Stanford Accraseam™ RT³ Rewind Turret Shrink Sleeve Label Seamer

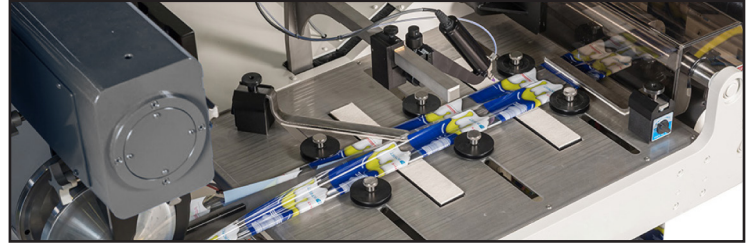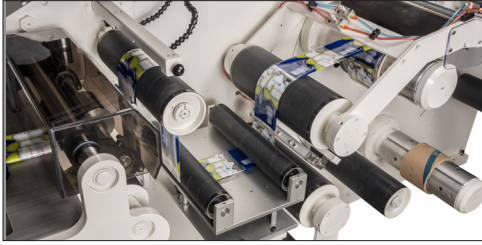


A Seamer So Fast it Requires Three Shafts to Keep Up.

With the addition of the RT³, the AccraSeam™ becomes a continuous operation rewind. The unique three shaft turret provides time for operators to load rolls at speeds up to 600 mpm [2,000 fpm].

By indexing the solvent gap to another roll and running on a clean core, 95% of the output can be shipped directly. Flange-mounted rewind shafts and electronic core offset allows operators to quickly change from one core size to another.

The RT³ is available as a field upgrade to any AccraSeam™, allowing existing machines to be upgraded as required to grow as your business grows. The AccraSeam™ includes a fully-automatic servo table setup, and a layflat quality check system that provides on-machine printed reports for each roll.

Accraply engineers a large selection of Stanford Doctor Machines®, a complete line of duplex differential slitter rewinders and shrink sleeve finishing equipment, as well as customized equipment.

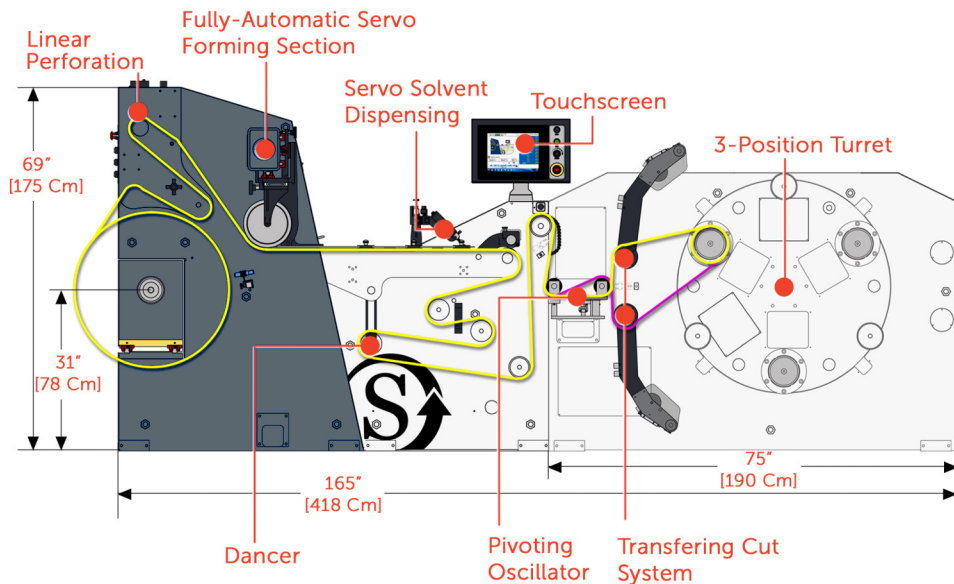

| | |
|-------------------------|--|
| Minimum Layflat Width | 50mm [2"] |
| Maximum Layflat Width | 305 mm [12"] |
| Maximum Web Speed* | 600 mpm [2,000 fpm] |
| Maximum Unwind Diameter | 610 mm [24"] |
| Maximum Rewind Diameter | 610 mm [24"] |
| Tension | 0.26 Kg/Cm [1.5 PLI] |
| Total Minimum Tension | 1.7 Kgf [3.75 lbf] |
| Shaft Options | 76.2 mm, 127 mm, 152 mm [3", 5", 6"] |
| Solvent Options | Table Needle [Standard] Table Wick Rear Needle |
| Machine Options | 17-25 mm Fixed Kit 25-50 mm Adjustable Kit Layflat Monitoring Quality Reports Automatic Flagging UV Detection |

Accraply's Gold Standard of Service

"We commit to deliver the highest level of customer care driven by our passion to provide the best customer experience in everything we do."

Accraply | Trine | Stanford | Graham & Sleevit | Harland

Accraply

9350 W Broadway Avenue, Suite 190 +1 (763) 557-1313
Minneapolis, MN 55445 USA accraply.com

