

35PW "S" Series Labeling System



Features

- Heavy-duty construction utilizes oversized drive components combined with an aluminum stainless steel base frame for years of dependable service
- Adjustable variable speed conveyor
- Quick "no-tools" adjustments with position indication for fast, repeatable changeover
- Various product infeed systems available that produce precise product spacing for your applications
- Centrally driven wrap-belt for constant speed synchronization
- Quick-change wrap-belt assemblies for labeling within a recess or beneath oversize caps
- Advanced high torque servo driven applicators include ratio-offset and speed-following capability for accurate and reliable application of a wide variety of label materials
- Drop-in-from the top label threading web path with quick-release rewind reel core
- Convenient centralized pivoting touch-screen

35PW "S" Series High Speed Panel & Wraparound Labeling System

The Accraply 35PW is an extremely versatile labeling system designed for the application of panel and wraparound labels on a wide range of container shapes.

With superb product handling the 35PW can label front and/or back panel labels on square, rectangular or oval containers as well as wrap labels around cylindrical products. This technology is ideal for copackers who must switch from one application to another with ease and limited downtime. The standard configuration allows you to change between multiple product shapes and sizes with no tooling changes.

The rugged construction for demanding continuous-duty operation, the quick and easy changeover capability from one product to another, and proven technology make this system an exceptional value.

Options


- Metering wheels or dual screws
- Thermal printer or various other printers
- Wide web label capacity
- Line driven wrap assemblies for dispense/wrap & flag/wrap
- Clear film label sensor
- Infeed and outfeed product backlog sensor
- Conveyor extensions
- Large capacity powered rewinds and unwinds
- Inspection options

Accraply's Gold Standard of Service

"We commit to deliver the highest level of customer care driven by our passion to provide the best customer experience in everything we do."

Application Rate	Up to 3000" per minute
Production Rates	Up to 600 per minute depending on product and label sizes
Electrical Requirements	220VAC, 3-Phase, 60 Hz, 20 Amp Service
Air Requirements	80 PSI
Product Conveyor	4.5" wide flush sided
Product Capacity	Maximum Diameter: 8" Maximum Height: 12.5" Minimum Diameter: .75" Minimum Height: 1.75"
Label Capacity	Maximum Length: 20" Maximum Height: 6" Minimum Length: .75" Minimum Height: .375"
Machine Dimensions	Length ≈ 132" Width ≈ 85" Height ≈ 66"

** All specification and tooling requirements are subject to Accraply evaluation of all label and product samples. Specifications shown reflect standard machine capabilities. Accraply can also meet other specification requirements. Please call for details.*

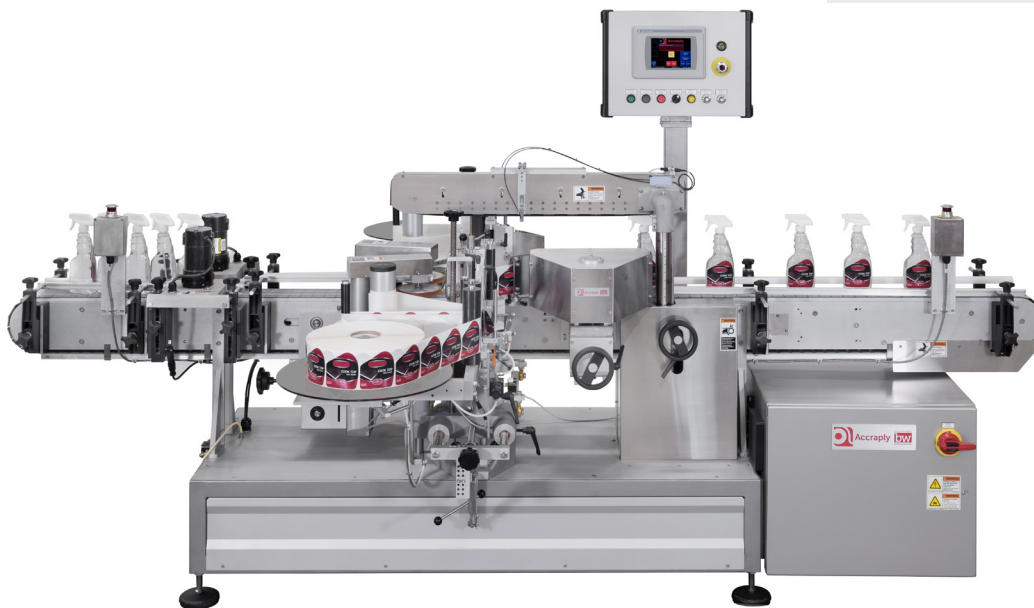

Accraply | Trine | Stanford | Graham & Steevit | Harland

Accraply

9350 W Broadway Avenue, Suite 190 +1 (763) 557-1313
Minneapolis, MN 55445 USA accraply.com