

Trine 4450 Labeling System



Features

- Efficient glue wheel transfer to minimize glue consumption
- PLC controlled for reliability and ease of operation
- Container infeed feedscrew system standard
- Small footprint takes up minimal space
- Industry's strongest field service organization reduces downtime
- Accraply quality and performance you expect

Trine 4450 Roll-Fed Labeling System


For those who Demand Delicate Product Handling...

The 4450 roll fed wraparound system has been designed with an extended conveyor and feed screw change parts standard for smooth high-speed container handling. Equipped with quick change parts, a product changeover can take one person less than 20 minutes with just a single tool guaranteed. To provide precise label application the 4450 is designed with the latest in glue application technology and label registration control. With advanced technology, quicker changeovers, and affordable change parts, the 4450 provides a roll fed labeling system ideal for any demanding environment.

With applications in beverage, food, pharmaceutical, cosmetic, dairy, aerosol and nutritional product industries, Trine roll fed labeling systems have proven their versatility. Trine roll fed labelers provide ongoing savings by replacing higher-cost cut labels. Additionally, Trine systems can even be used to label contour containers with Trine's patented Roll 'n' Shrink technology. With over 2000 systems currently labeling brands such as Coke and Pepsi, you too can rely on Trine labelers

Options

- Discharge stabilizer assembly
- Clear label sensor and low label detection
- Air conditioned electrical enclosure
- Servo-driven label registration system
- Alternative voltages, conveyor heights, and colors
- Custom product handling
- Additional options available. Contact an Accraply representative for more information.

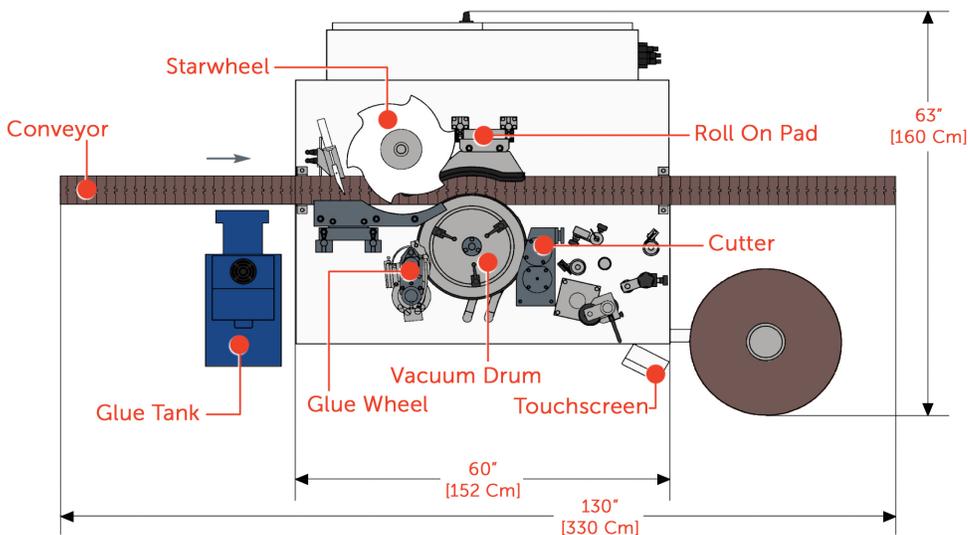

Maximum Speed:	350 Containers per Minute
Repeat Length:	6.5" to 16.5" [1.53.4mm to 419.1mm]
Web Width:	1" to 8.25" [25.4mm to 209.6mm]
Diameter:	1.75" to 5" [44.5mm to 127mm]
Air	80 psi (5.52 bar), 12-15 cfm (340-425 L/min)
Electrical:	240 VAC, 3-Phase, 50/60hz
Weight:	3,200 lbs [1,451 kg]

** All specification and tooling requirements are subject to Accraply evaluation of all label and product samples. Specifications shown reflect standard machine capabilities. Accraply can also meet other specification requirements. Please call for details.*

Accraply's Gold Standard of Service

"We commit to deliver the highest level of customer care driven by our passion to provide the best customer experience in everything we do."

Accraply | Trine | Stanford | Graham & Steevit | Harland

Accraply

9350 W Broadway Avenue, Suite 190
Minneapolis, MN 55445 USA

+1 (763) 557-1313
accraply.com

