

# **DF100 Shrink Sleeve Applicator**



## **Features**

- The DF Shrink Sleeve Applicator applies Tamper Evident sleeves.
- Shrink sleeve labels applied to filled containers made of the most popular sustainable plastics including Metal and Glass.
- For use with PETG, PETC, RPET, PO, OPS, Hybrid, PVC, PLA material 40 to 70 microns thick.
- Two modularly guillotine cutting units are available for products between (30mm 100mm), (30 125mm).
- Toolless mechanical adjustment.
- Servo controlled.
- Next generation Smartlink™ HMI.
- Speeds up to 100 containers per minute.

BW Packaging represents the collective capabilities of Barry-Wehmiller packaging companies including, Accraply, BW Flexible Systems, BW Integrated Systems, Pneumatic Scale Angelus and Synerlink. Through their diverse capabilities, these companies can collectively provide everything from a single piece of equipment to fully integrated packaging systems for a wide range of industries, including: food and beverage, personal care, container manufacturing, pharmaceutical and medical devices, household products, paper products and textiles, industrial and automotive, and converting, printing and publishing. For more information, go to *BWPackaging.com* 




## **DF100 SHRINK SLEEVE APPLICATOR**


In an ever-evolving shrink sleeve marketplace where the focus is on sustainability and label down gauging, the DF Shrink Sleeve Applicator is designed to handle the latest label technology, with a modular design to offer flexibility to scale, based on your business needs.

The DF Shrink Sleeve Applicator is ergonomically designed to focus on safety, ease of use, productivity, and performance while optimizing a minimal footprint.

Improve output, ease changeovers, simplify operations, and reduce maintenance costs, all while improving shrink sleeve label appearance!

The comprehensive range of Accraply ancillary modules along with Accraply's range of Hot Air (Convection) and IR (Infra-Red) heat tunnels can be incorporated with DF Shrink Sleeve Applicator providing a totally integrated solution.

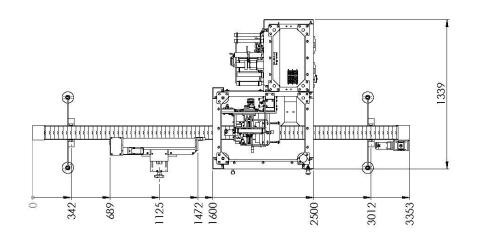

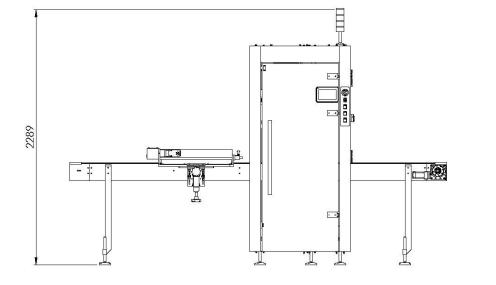



| Product Diameter           | (170mm width Guillotine)<br>30mm - 100mm (210 width<br>Guillotine) 30mm - 125mm |
|----------------------------|---|
| Sleeve Length              | 30mm - 50mm   |
| Maximum Speed              | 100ppm @ 30mm cut-length  |
| Film Type                  | PETG, PETC, REPT, PO, OPS,<br>Hybrid, PVC, PLA                                  |
| Film Thickness             | 40 - 70 microns   |
| Maximum Unwind<br>Diameter | 350mm OD  |
| Unwind Core<br>Diameter    | 127mm (5")  |
| Machine Weight             | 250 KG  |
| Conveyor Height            | 900 - 1000mm  |
| Air Requirements           | 80 PSI 5 bar/0.2cu M/MIN  |
| Electrcial<br>Requirements | 380v - 415 Vac<br>3 Phase +<br>Neutral + Earth 20A                              |

\* All specification and tooling requirements are subject to Accraply evaluation of all label and product samples. Specifications shown reflect standard machine capabilities. Accraply can also meet other specification requirements. Please call for details.

#### Accraply | Trine | Stanford | Graham & Sleevit | Harland

Accraply - United States

9350 W Broadway Avenue, Ste 190 3070 Mainway Minneapolis, MN 55445 USA +1 (763) 557-1313

Accraply - Canada Burlington, ON L7M3X1 +1 (905) 336-8880

### Accraply - United Kingdom

Northbank Industrial Estate, Gilchrist Rd accraply.com Irlam, Manchester M44 5AY +44 161 848 4800

info@accraply.com

